



A-105
CANTOR, FITZGERALD SECURITIES
E-2
10/20/83

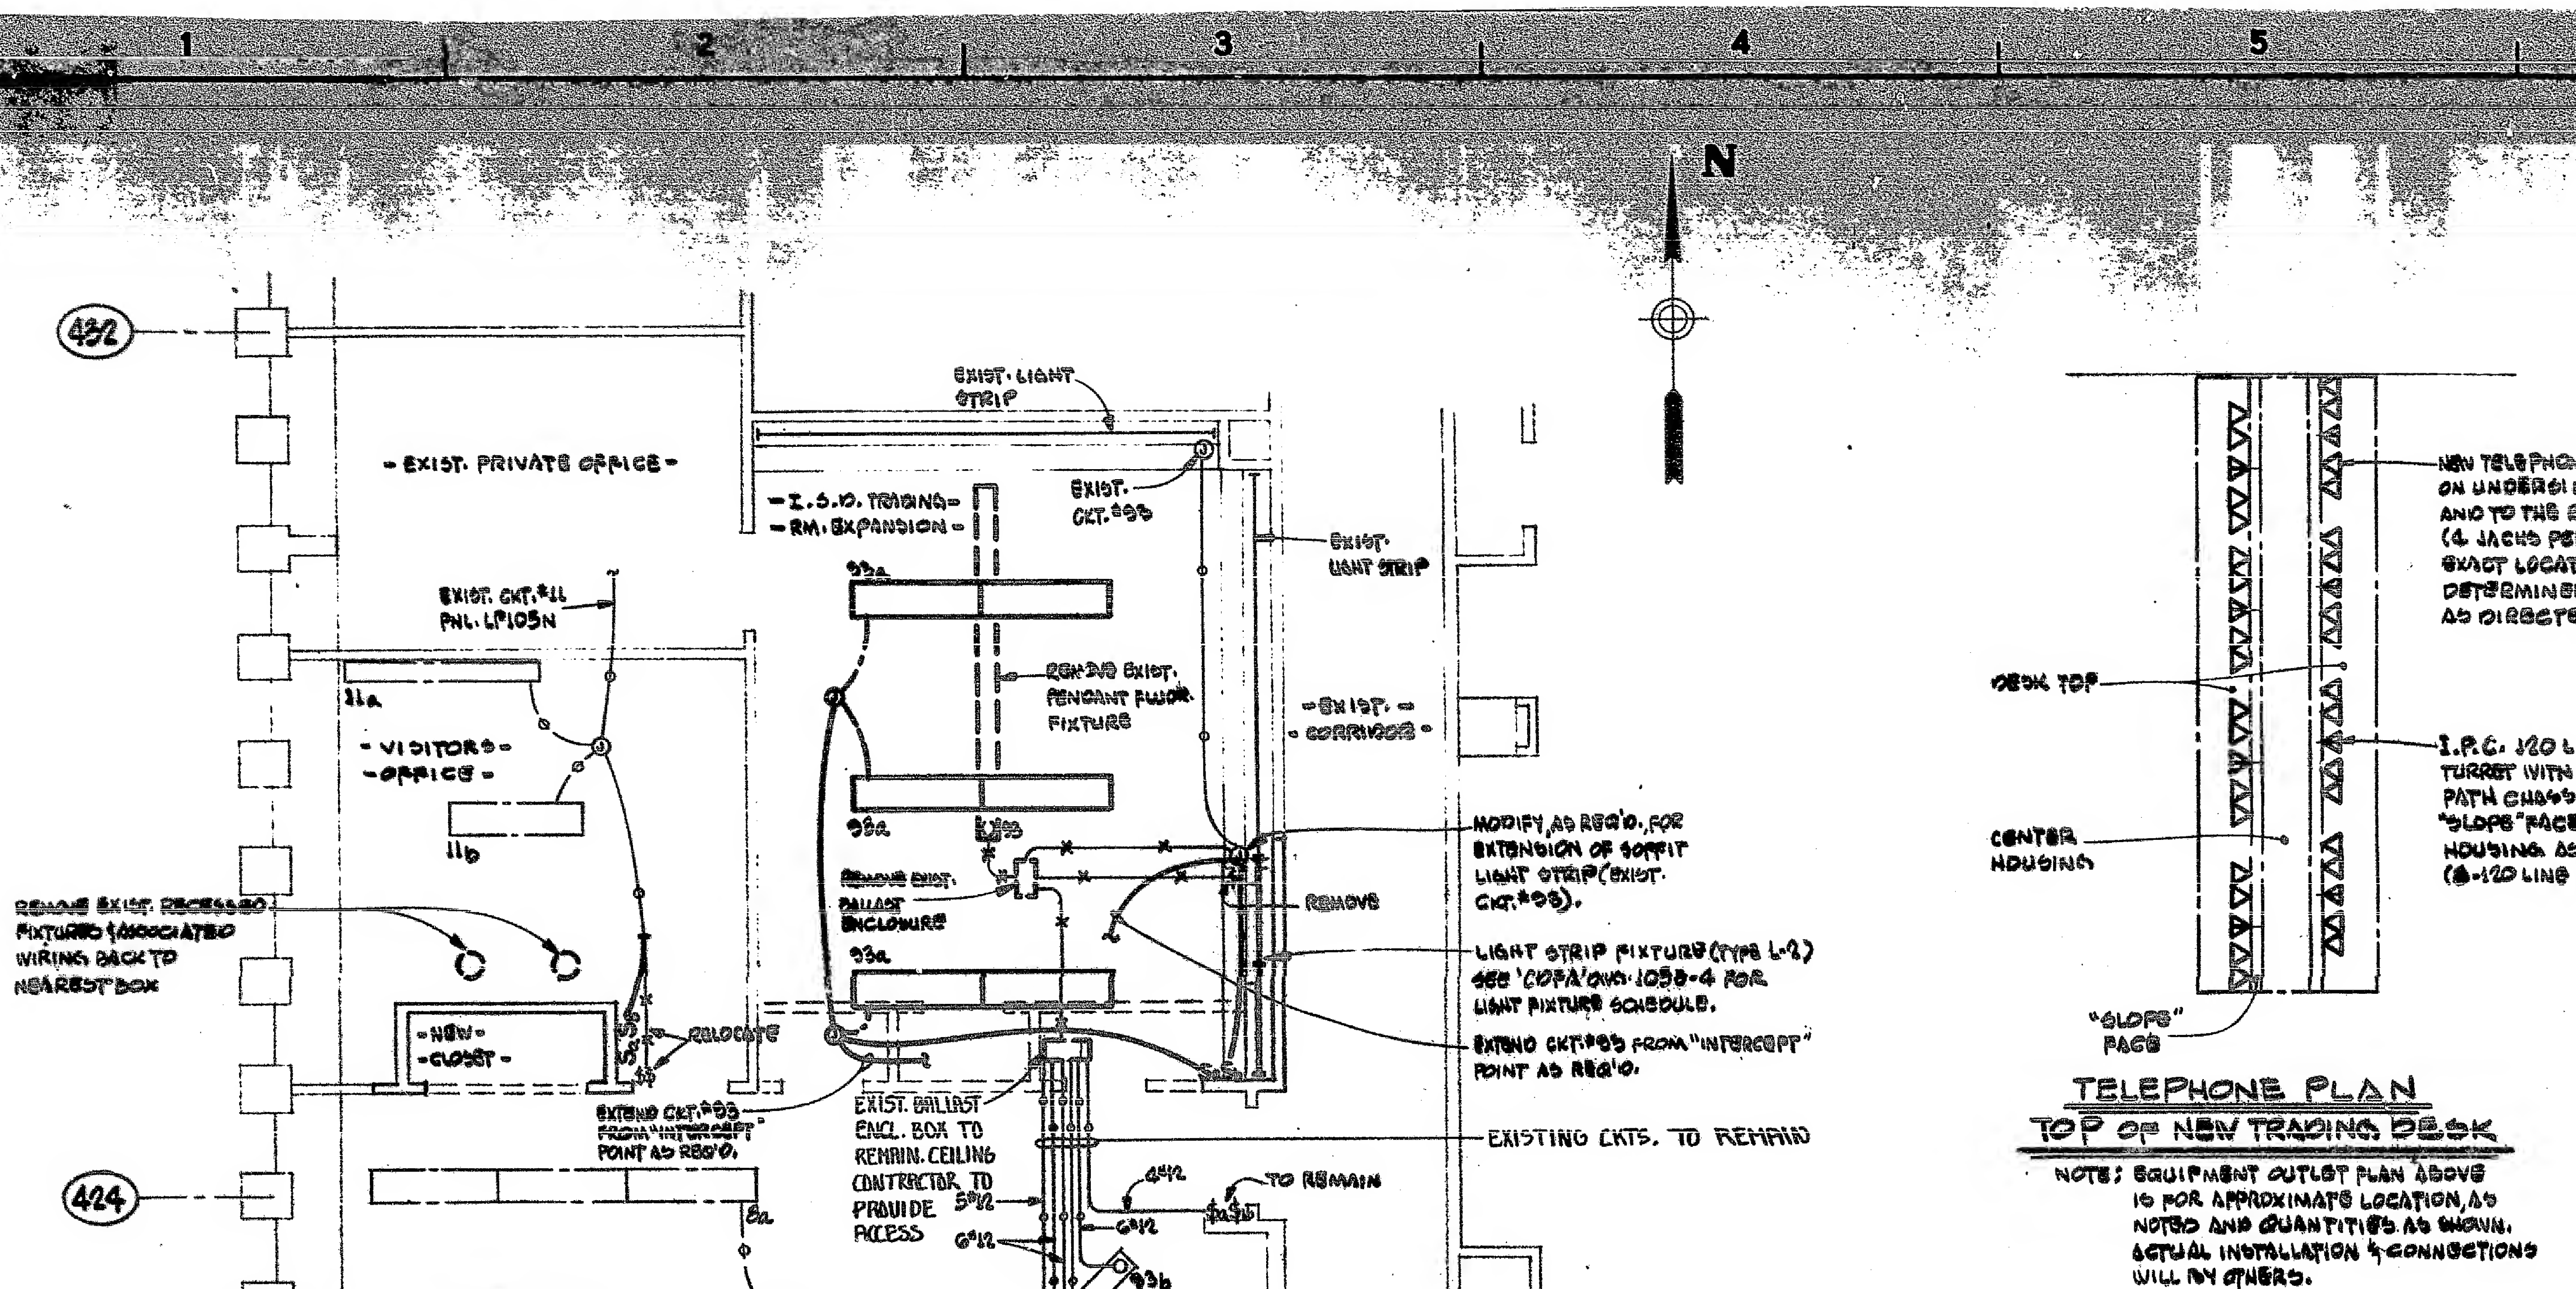

LIGHTING PLAN

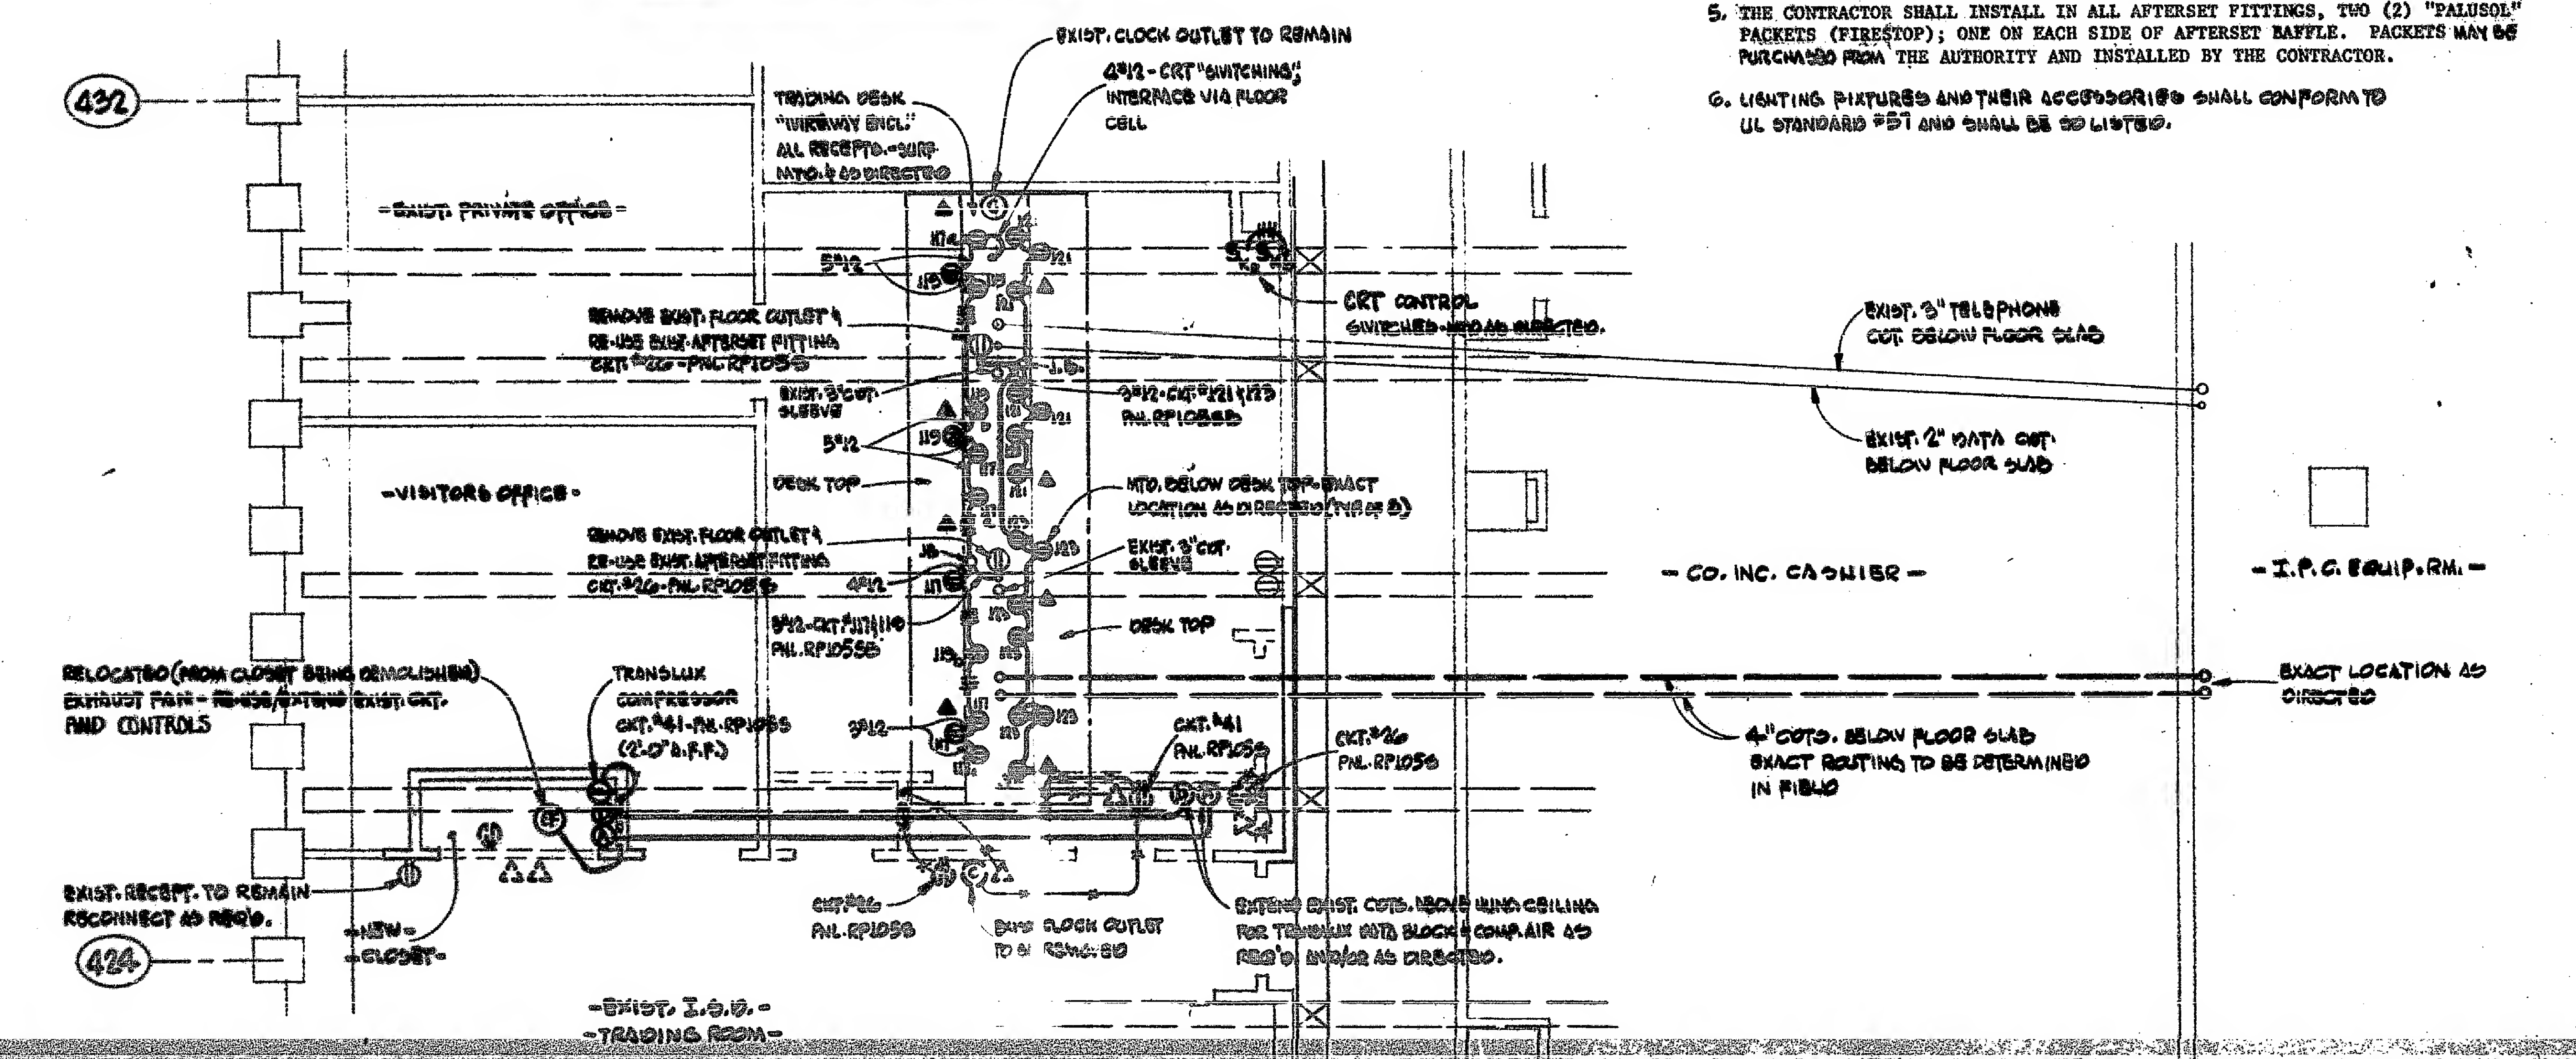

POWER AND TELEPHONE PLAN

- GENERAL NOTES**
1. ITEMS WHICH ARE REFERRED TO THIS NOTE IN THE LEGEND MAY BE PURCHASED FROM PORT AUTHORITY STOCK.
 2. FOR ELECTRICAL SPECIFICATIONS SEE DRAWING E-1.
 3. THE AUTHORITY WILL FURNISH BLANKING SETS FOR FLOOR OUTLET UNITS WHICH ARE TO BE CAPPED.
 4. ALL CONDUITS TO HAVE A MINIMUM OF 2 #12 WIRES (UL STANDARD #83), AND SHALL BE A MINIMUM OF 3/4" UNLESS OTHERWISE NOTED.
 5. THE CONTRACTOR SHALL INSTALL IN ALL AFTERSET FITTINGS, TWO (2) "FALUSOL" PACKETS (FIREFSTOP); ONE ON EACH SIDE OF AFTERSET BAFFLE. PACKETS MAY BE PURCHASED FROM THE AUTHORITY AND INSTALLED BY THE CONTRACTOR.
 6. LIGHTING FIXTURES AND THEIR ACCESSORIES SHALL CONFORM TO UL STANDARD #51 AND SHALL BE 220 VOLTS.